




BASIC FEATURES

AGE GROUP: 18 months to 12 years old
 FALL HEIGHT (CSA): 16" (0,4m) (ASTM): 16" (0,4m)
 CHILD CAPACITY: 1 child
 DIMENSION (WT x DT x HT): 2'4" x 2'10" x 4'0" (0,7m x 0,9m x 1,2m)
 SHOCK ABSORBING SURFACE (CSA): 15' x 15' (4,6m x 4,6m)
 SHOCK ABSORBING SURFACE (ASTM): 15' x 15' (4,6m x 4,6m)

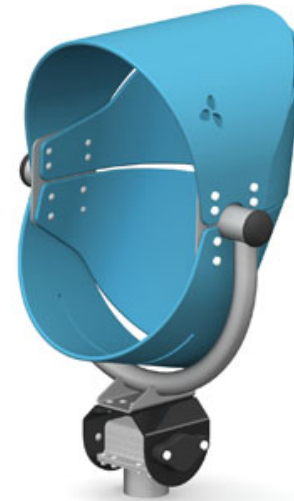

DESCRIPTION

Ideal for those who need a moment of tranquility. The rocking movement of this equipment provides a relaxing effect. In addition, the enveloping shape of its walls can offer its user a soothing effect and a sense of security.

ANCHORING



ON CONCRETE
 This product is anchored to the ground with concrete columns.

MATERIALS

METALS

- Base:** Made of steel tube measuring 4-1/2" (114mm) in diameter.
- Hardware:** Made of stainless steel, Anti-vandal type.
- Metal frame(s):** Steel tube measuring 3-1/2"(89mm) in outer diameter.
- Metal frame(s):** Steel tube measuring 2-3/8" (60mm) in outer diameter.
- Metal frame(s):** Steel plates (44W)
- Floor structure:** Made of hot dipped galvanized steel

COATINGS

Paint: Painted metal parts are white blasted first, then coated with a primer and Z-series polyester powder, which has an extreme resistance to ultraviolet (UV) rays and weather. (lv)

PLASTIC MATERIALS

Plate(s): Panels are made of HDPE polyethylene colored in the mass and treated against UV rays. All edges are rounded for maximum safety.(lv)

FLEXIBLE MATERIALS

Oscillation System: Made of 82 durometer ultra resistant rubber, treated against UV rays and steel reinforced. (lv)

COLOUR CHOICES

Steel



Polyethylene Panels (1/2")



Made at our factory in Lévis, Québec, Canada • Meets CAN/CSA-Z614 and ASTM ASTM F1487