




**BASIC FEATURES**

AGE GROUP: 18 months to 12 years old  
 FALL HEIGHT (CSA): 42" (1,1m) (ASTM): 42" (1,1m)  
 CHILD CAPACITY: 13 children  
 SHOCK ABSORBING SURFACE (CSA): 23' x 33' (7m x 10,1m)  
 SHOCK ABSORBING SURFACE (ASTM): 21' x 33' (6,4m x 10,1m)

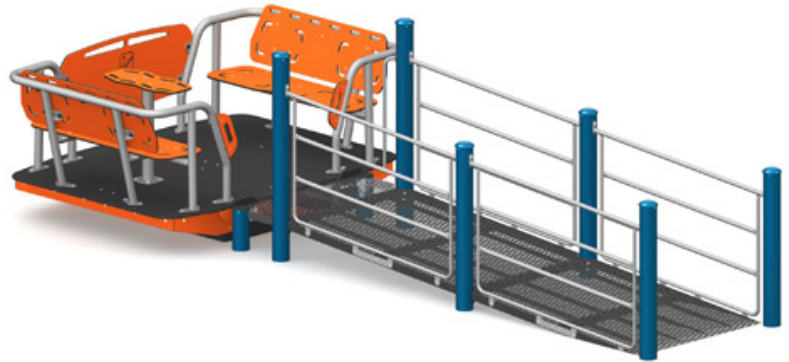

**DESCRIPTION**

This platform, which rocks from right to left, has all the space needed to accommodate two wheelchair users. The area offers an interesting socializing place for children with mobility disability.

**ANCHORING**



**IN CONCRETE**

This product is anchored to the ground with concrete columns.



**ON STRINGERS**

This product is anchored by a system of frames covered with a protective coating buried in the ground. Some parts of the frames can be made from recycled plastic.

**MATERIALS**

**METALS**

- Post(s):** 6061-T6 aluminum alloy tube measuring 5" (127mm) in outer diameter, with 0.125" wall thickness.
- Hardware:** Made of stainless steel, Anti-vandal type.
- Hardware:** Made of stainless steel, camouflaged by HDPE safety caps.
- Metal frame(s):** 6063-T52 aluminum alloy tube measuring 1-1/2" (38mm) in outer diameter, with 0.120" wall thickness.
- Metal frame(s):** 6063-T52 aluminum alloy tube measuring 2-3/8" (60mm) in outer diameter, with 0.154" wall thickness.
- Metal frame(s):** Steel tube measuring 3" by 1-1/2"
- Metal frame(s):** Aluminium plates 6061-T6
- Metal frame(s):** Steel plates (44W)
- Metal frame(s):** Steel tube measuring 1-5/16"(33mm) in outer diameter.

**COATINGS**

- Paint:** Z-Series polyester powder, with ultraviolet (UV) rays and weather extreme resistance. Our paint also has antibacterial and antiviral properties.(sv)
- Galvanization:** Some attachments are hot dipped galvanized.
- Paint:** Painted metal parts are white blasted first, then coated with a primer and Z-series polyester powder, which has an extreme resistance to ultraviolet (UV) rays and weather. Our paint also has antibacterial and antiviral properties (lv)

**FLEXIBLE MATERIALS**

- Rubber:** 1/4" thick rubber strap made of three rubber layers laminated with two polyester linings. The top and the underside are smooth.

**COLOUR CHOICES**

**Polyethylene Panels (3/4")**



**Aluminum / Steel**



Made at our factory in Lévis, Québec, Canada • Meets CAN/CSA-Z614 and ASTM ASTM F1487